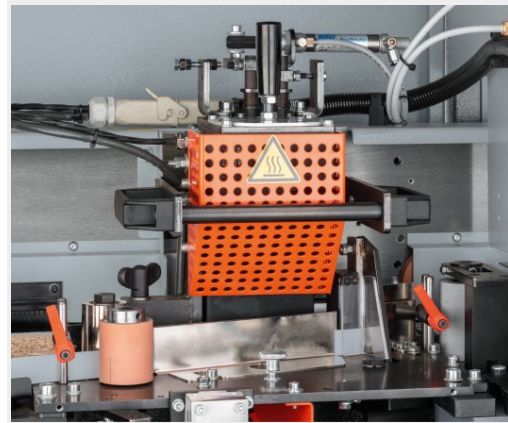

HEBROK Type F4 edgebander

Hebrock - Code : AR00825



Technical description

HEBROCK Type F4 edgebander

Machine composition:

- Touch screen
- Double diamond calibration aggregate with interchangeable diamond pad
- 3 roller pressure zone - Pre-equipped for interchangeable tray with drainage device of gravity glue - End cut
- Milling group
- Copier (rounder)
- Surface scraper
- Front extension with 3 superimposed positions

Technical description: - Max. thickness. edges: 2 mm

- Min./max. thickness part width: 8 - 50 mm

- Min. length of the room: approx. 160mm

- Torque speed: 7 m/min.

HEBROK Type F4 edgebander

Hebrock - Code : AR00825

Technical description (continuation)

- Commissioning time: approx. 3.5 mins
- Consumption: approx. 7.4kW
- Power supply values: 400 V - 3 Ph - 50 Hz
- Height of the work surface: approx. 900mm
- Machine dimensions: approx. 4050 x 1300 x 1400 mm (L x W x H)
- Weight: approx. 820 kg
- Suction tubes: 1 x 140 mm

Options included:

- Whispercut calibration head - F4/500/10
- Combined milling head - F4/500/20
- Rounded cutter radius R=2mm - F4/500/2
- Copier radius R=2mm - F4/08/2

Packaging :

- Package dimensions : 3.90 x 1.10 x 1.55 m
- Weight: gross 860 kg, net 821 kg